



Zero su višenamjenske šok komore sa isparivačem u vidu saća i ventilatorima vertikalno postavljenim na zadnjem unutrašnjem panelu. Izrađene od inox-a AISI 304, sa zaobljenim unutrašnjim ivicama. Monolitna struktura sa poliuretanskom izolacijom utisnutom pomoću CO₂.

Jednostavne za upotrebu i funkcionalne, opremljene digitalnim kontrolnim panelom sa višenamjenskim LCD displejem i funkcijom zumiranja radi olakšanog čitanja parametara zadatih programa.

Tehničke karakteristike:

- Automatsko otapanje na principu vrućeg freona, sa mobilnom posudom za sakupljanje kondenzacije
- visoke stope podesive po visini izrađene od inox-a AISI 304
- ugradni kompresor velike snage

raspoloživi modeli

T5	SP
----	----

T8	VT	SP
----	----	----

T8	OR	SP
----	----	----

T12	VT	SP
-----	----	----

T16	VT	SP
-----	----	----

T5	SP	GEL
----	----	-----

T8	VT	SP	GEL
----	----	----	-----

T8	OR	SP	GEL
----	----	----	-----

T12	VT	SP	GEL
-----	----	----	-----

T16	VT	SP	GEL
-----	----	----	-----

• opcioni dodaci	dimenzije (mm)	model
• inox klizači za sladoledne vaskete		T5 T8 VT, T8 OR T12 T16
• set od 3 inox-ne police		T5
• set od 6 inox-nih polica		T8 VT, T8 OR
• set od 9 inox-nih polica		T12
• set od 10 inox-nih polica		T16
• plastificirane police	400 x 600	
• inox-ne police	400 x 600	
• pekarski plehovi	400 x 600 x 20h	
• plastificirane police	530 x 325	
• inox-ne police	530 x 325	
• gastro posude GN1/1	530 x 325 x 20h	
	530 x 325 x 40h	
	530 x 325 x 60h	
	530 x 325 x 100h	
• sonda za tečne materije		
• lampa za sterilizaciju		
• ugradni printer		

sladoledne vaskete

- 360x165x120h
5 litara



- 360x250x80h
5 litara



T5

6



6



T8

12




12





T12

18




18






T16

21



20



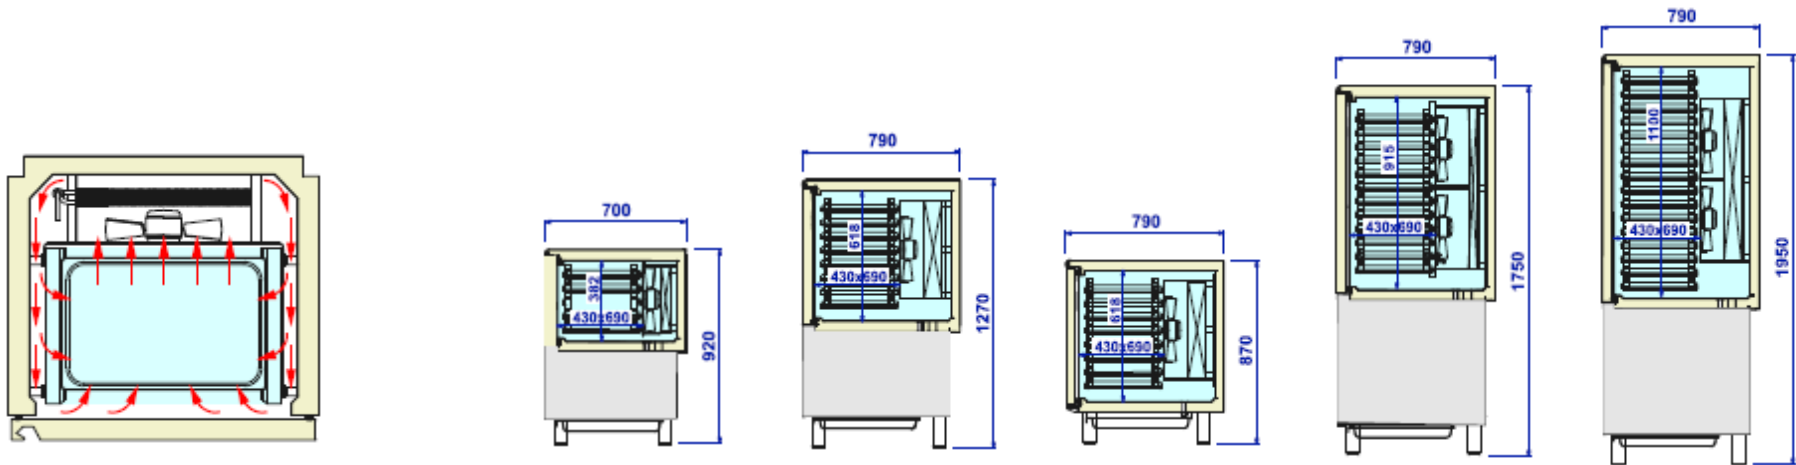

tehničke karakteristike / model		T5	T8 VT	T8 OR	T12 VT	T16 VT
		SP	SP	SP	SP	SP
dimenzije	mm	800 x 700 x 920	800 x 790 x 1270	1435 x 790 x 870	800 x 790 x 1750	800 x 790 x 1950
hlađenje		ventilaciono	ventilaciono	ventilaciono	ventilaciono	ventilaciono
brzo hlađenje	°C	+90/+3	+90/+3	+90/+3	+90/+3	+90/+3
kapacitet hlađenja/90 min	kg	18	25	25	36	55
brzo zamrzavanje	°C	+90/-18	+90/-18	+90/-18	+90/-18	+90/-18
kapacitet zamrzavanja/240 min	kg	12	16	16	24	36
otapanje		vrućim freonom	vrućim freonom	vrućim freonom	vrućim freonom	vrućim freonom
ambijentalni uslovi rada	°C / %RH	30 / 55	30 / 55	30 / 55	30 / 55	30 / 55
napon	V/ph/Hz	230 / 1 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
potrošnja energije (režim rada)	W/A	1000 / 4.7	2500 / 4.6	2500 / 4.6	2800 / 5.7	4200 / 7.9
potrošnja energije (režim otapanja)	W/A	1890 / 9	2900 / 5.1	2900 / 5.1	3300 / 6	5100 / 8.6
rashladni kapacitet (-10°C/+40°C)	W	3300	4500	4500	5500	6900
neto težina	kg	120	180	190	210	240